

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 740 344 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

30.10.1996 Bulletin 1996/44

(51) Int. Cl.⁶: H01L 27/02

(21) Application number: 96106206.4

(22) Date of filing: 19.04.1996

(84) Designated Contracting States:
DE FR GB

(30) Priority: 24.04.1995 US 427017

(71) Applicant: ROCKWELL INTERNATIONAL
CORPORATION
Seal Beach, California 90740-8250 (US)

(72) Inventors:

- Worley, Eugene R.
Irvine, California 92720 (US)

- Nguyen, Chilan T.
Fullerton, California 92633 (US)
- Kjar, Raymond A.
Costa Mesa, California 92626 (US)
- Tennyson, Mark R.
Irvine, California 92714 (US)

(74) Representative: Geyer, Ulrich F., Dr. Dipl.-Phys.
WAGNER & GEYER,
Patentanwälte,
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Method and apparatus for coupling multiple independent on-chip V_{dd} busses to an ESD core clamp**

(57) A single clamp circuit 100 for integrated circuits with multiple V_{dd} power pins by coupling the various V_{dd} busses to an ESD clamped V_{dd} bus 140 or pseudo-V_{dd} bus via diodes 110, 150, ..., 191. The diodes will provide coupling from any V_{dd} bus 140 to the clamp circuit 100 during a positive ESD transient. A diode 110 for each V_{dd} bus and a single clamp circuit can be much more area efficient than a single clamp circuit for each V_{dd} bus. During normal operation, the diodes 110, 150, ..., 191 will become weakly forward biased due to the leakage current of the clamp circuit. Small signal noise will tend not to be coupled from one bus 140 to the other because of the high impedance of the diodes 110, 150, ..., 191. For a large positive noise transient on one bus 140, the other bus diode will reverse bias, thus decoupling the signal from the other busses. A large negative noise transient on one bus 140 will cause its diode to reverse bias thus decoupling it from the other busses. To help filter small signal noise and provide an additional charged device model discharge path, a capacitor 151 is added from the pseudo or ESD V_{dd} to substrate ground. Also disclosed is an ESD protection scheme for allowing a pad voltage to exceed the power supply voltage without using an avalanche junction as the ESD protection means. Further disclosed is a clamp scheme for allowing the transistors of the power supply clamp to see voltages lower than that of the pad voltage which exceed the process reliability limits.

EP 0 740 344 A2

Description

RELATED APPLICATION

The present application relates to a U.S. Patent Application, filed on July 26, 1994, with Serial No. 280,417, entitled ESD PROTECTION SUBMICRON CMOS CIRCUITS by Eugene R. Worley et. al., a co-inventor of the present application, and assigned to the present assignee. The disclosure of the Related Application is hereby incorporated by reference.

FIELD OF THE INVENTION

The present invention relates to electrostatic discharge ("ESD") protection circuits for integrated circuits ("IC") and more particularly to ESD devices for IC's for mixed signal applications.

ART BACKGROUND

Recent progress in VLSI technology has made IC's with smaller and smaller geometry's a reality. As the devices become more miniaturized, however, they also become more susceptible to electrostatic discharge (ESD) damage. If not properly diffused, ESD can destroy a device, lower reliability and eventually reflect in the bottom line of an electronic device manufacturer.

Protecting a device from the consequences of ESD has been quite an endeavor for those skilled in the art. Integrated circuits nowadays are fabricated with many layers of thin film materials such as thermal oxides, dielectric layers, polycrystalline silicon and metal films. The addition of each layer complicates the ESD problem.

To minimize the effect of ESD on integrated circuits, protection devices have been constructed for the input and output pads of a device for the purpose of absorbing the sudden surge of ESD. Conventional ESD protection structures, however, are effective primarily in devices with a single V_{dd} power supply for digital signals.

For IC's with mixed signals, i.e. digital and analog signals, multiple independent V_{dd} power supply busses are required to accommodate the requirement of isolation between the various circuit functions. To provide adequate ESD protection, it is necessary to use a core clamp circuit to provide a robust discharge path from a pad, through a P⁺/well diode, and through the clamp from each V_{dd} to substrate ground for positive ESD surges.

Unfortunately, the clamp circuit requires a significant amount of area given that a cumulative minimum NFET ("n-channel field-effect transistor") width of 6400 μ is generally required to be connected from V_{dd} to substrate for each bus clamp. For chips with several V_{dd} busses, the area becomes prohibitively large when clamps are provided for each V_{dd} bus.

SUMMARY OF THE INVENTION

Therefore, it is an object of the present invention to provide ESD protection to IC's with multiple V_{dd} power supplies.

It is another object of the present invention to provide ESD protection to IC's with multiple V_{dd} power supplies for mixed signals applications.

It is further an object of the present invention to provide ESD protection to IC's with multiple V_{dd} power supplies for mixed signals applications while maximizing silicon area efficiency.

It is also another object of the present invention to provide ESD protection to IC's having pad voltage capable of exceeding the supply voltage and/or the process limit of transistors.

It is therefore proposed that a single clamp circuit be used for IC's with multiple V_{dd} clamps by coupling the various V_{dd} busses to an ESD clamped V_{dd} bus or pseudo- V_{dd} bus via diodes. The diodes will provide coupling from any V_{dd} bus to the clamp circuit during a positive ESD transient. A diode for each V_{dd} bus and a single clamp circuit ("BIGFET" as referred to in the aforementioned related U.S. Patent Application) can be much more area efficient than a single BIGFET clamp circuit for each V_{dd} bus.

During normal operation, the diodes will become weakly forward biased due to the leakage current of the clamp circuit. Small signal noise will tend not to be coupled from one bus to the other because of the high impedance of the diodes. For a large positive noise transient on one bus, the other bus diode will reverse bias, thus decoupling the signal from the other busses. A large negative noise transient on one bus will cause its diode to reverse bias thus decoupling it from the other busses. To help filter small signal noise and provide an additional charged device model ("CDM") discharge path, a capacitor is added from the pseudo or ESD V_{dd} to substrate ground.

BRIEF DESCRIPTION OF THE DRAWINGS

Additional objects, features and advantages of the present invention will become apparent to those skilled in the art from the following description, wherein:

Figure 1 shows a simplified circuit diagram of a multiple supply bus protection circuit with a shared transient clamp in accordance with the present invention.

Figure 2 shows another circuit diagram of a multiple supply bus protection network with a shared transient clamp in accordance with the present invention.

Figure 3 shows a generalized diagram of the "BIGFET" transient clamp for applications where the I/O pad voltage exceeds the supply voltage.

Figure 4 shows a generalized diagram of the transient clamp for applications where the V_{esd} bus voltage exceeds the process limit voltage.

Figure 5 shows another preferred embodiment of the protection circuit in accordance with the present invention.

DETAILED DESCRIPTION OF THE DRAWINGS

1. ESD PROTECTION NETWORK FOR INTEGRATED CIRCUITS WITH MULTIPLE SUPPLIES

Figure 1 shows a basic circuit diagram of a multiple power supply ESD protection in accordance with the present invention. For multiple supplies, i.e. $V_{\text{dd}1}$ 120, $V_{\text{dd}2}$ 160 to $V_{\text{dd}N}$ 190, a transient clamp ("BIGFET" Clamp) 100 is used for providing a transient current path. The common connection among the various supplies is a "bus", i.e. V_{esd} 140, which is connected to each supply through a coupling diode, 110, 150, 191. Note that diodes 131, 171 are normal P⁺/well pad diodes and diodes 132, 172 are normal N⁺/substrate pad diodes coupled to the I/O pads 130, 170, as will be appreciated by those skilled in the art. An I/O pad, as will be appreciated by those skilled in the art, may be an input-only pad, an output-only pad or an input/output pad. Note that a current path is created for transient currents from any I/O pad to V_{dd} pad 120, 160 or 190, through its coupling diode, 110, 150 or 191, V_{esd} bus 140 and the "BIGFET" clamp 100; to the substrate ground 102.

Figure 2 shows another embodiment of a multiple power supply protection network with a single shared "BIGFET" clamp 200 in accordance with the present invention. It should be noted that the "BIGFET" clamp is a transient clamp, which may be constructed in accordance with the aforementioned Related U.S. Patent Application. Note that the function of a transient clamp is to turn on only when the voltage changes very rapidly. However, those skilled in the art could readily construct their own transient clamps based on their respective applications and processes to take advantage of the teachings of the present invention. One other possible implementation of a transient clamp may be found in a publication entitled "ESD Design Methodology", p. 233, ELECTRICAL/OVERSTRESS ELECTROSTATIC DISCHARGE SYMPOSIUM, 1993.

While the transient clamp, i.e. the "BIGFET" clamp, has been, and will be, described as being constructed and implemented with MOSFET devices, as shown in Figure 3, 300, it should be appreciated by those skilled in the art that it may also be implemented with bipolar devices such that the transient clamp may be applied to bipolar circuits.

It should be noted that the substrate 202 is separate from the various V_{ss} supply pads 280, 285. The V_{dd} 's 220, 260, 290 to common clamp coupling is achieved using P⁺/well diodes 210, 250, 291, respectively. Note that this arrangement does not put any

restrictions on power supply sequencing or the magnitude of the power supply voltages appearing at the V_{dd} 's. V_{esd} 240 will reach a voltage equal to one diode drop below the highest power supply value. The clamp 200 is intended to provide a transient current path from V_{esd} 240 to substrate ground 202.

Other circuit elements include diodes 221, 261, which represent the well-to-substrate diodes collectively associated with the inherent PFET wells of the core circuit to be protected, diodes 282, 283, which represent the N⁺ to substrate diodes collectively associated with the inherent sources of core circuit NFETs, and diodes 232, 231, 272, 271, which are the typical pad diodes as will be recognized by those skilled in the art. Note that directional current loops are formed such as the one associated with diodes 272, 271, 250, and the clamp 200. Diodes 281 are V_{ss} -to-substrate coupling diodes which may be required for positive discharges into the V_{ss} pads 280, 285. These diodes are made using P⁺/well diodes. In the case shown here 3 serial diode group 281 are used to produce an isolation voltage of about 1.5V between V_{ss} 280 and V_{sub} 205. Note that the connection between the local substrate of the N⁺/substrate diode (232, 272) and the "BIGFET" clamp (200) is made by a direct metal connection rather than through the substrate. If bulk or deep implanted wafers are used this connection may become absolutely necessary. A capacitor 251 is used to attenuate high speed, low energy pulses associated with machine discharges and has an intrinsic time constant no greater than 100 ps.

It can be seen in Figure 2 that there exists a robust current path from any pad, I/O Pad or V_{dd} Pad, to any other pad or to the substrate 202. Thus, this configuration handles any polarity of discharge to any pin or between any pins of the device.

The I/O pad 292 associated with diodes 293, 294 may be a pad whose input voltage can rise above any V_{dd} . In this case, V_{esd} 240 is set by the maximum voltage on this pad minus a diode drop produced by the diode 293. Note that the pad source should provide at least some of charging current for the capacitance of V_{esd} 240. It is possible to put a charge pump voltage source on V_{esd} 240 if this arrangement is not satisfactory as will be appreciated by those skilled in the art. The charge pump needs to be only large enough to supply the leakage current associated with the clamp 200 circuit (several μA worst case). The charge pump will be described in the following section.

Those skilled in the art will also recognize that ESD discharges can be viewed as current sources whose peak currents are on the order of Amps. Discharge times typically range from less than 1 ns for a machine-type discharge to over 100ns for a human-type discharge. Because of the large currents, big diodes and wide metal lines are required. The size of the shunt devices are such that voltage drops produced by the large ESD discharge current do not cause junctions or transistors to avalanche breakdown. For a typical sub-

micron process, this is about 12 v for an NFET. Break-down of a silicided junction almost invariably produces leakage. Fortunately, diodes operated in the forward direction are extremely robust. For designs where isolation is critical, it may be necessary to simulate the feed through effects of the capacitance of the coupling diodes.

2. ESD PROTECTION PADS WITH MAXIMUM VOLTAGE EXCEEDING POWER SUPPLY

Reference is now to Figure 3, where a generalized ESD clamp with I/O pads is shown. To the left of the dotted line is the pad element 30 of the ESD protection network, while the other side is the clamp circuit element 31. Figure 3 shows a generalized diagram of a "BIGFET" power supply clamp used for applications in which the I/O pad 330 voltage can exceed V_{dd} 341. For this case, V_{dd} 341 charges a dedicated bus, V_{esd} 340, to V_{dd} minus a diode drop via a diode 342. Without the charge pump 370 as shown, an external circuit driving the I/O pad 330 may need to charge the V_{esd} bus 340 from this voltage of $(V_{dd}-V_{diode})$ to a voltage of $V_{IO}(\text{Max})$ minus a diode drop via a diode 331. Once charged, only a small leakage current will flow (a few uA worst case). If it is desired that the external circuit driving the I/O pad 330 not have to charge the V_{esd} bus 340 to $(V_{in}(\text{Max})-V_{diode})$ or sustain the bus 340 at this voltage because of leakage currents, then a small charge pump 370 can be added to both charge up V_{esd} 340 to this voltage and sustain the voltage.

The BIGFET clamp 300 offers a low impedance path from V_{esd} 340 to ground 301 when enabled by either one of two detectors 350, 360. Otherwise, the BIGFET clamp 300 is off and offers a high impedance path between the V_{esd} node 340 and the ground node 301. The transient detector 350 turns the BIGFET clamp 300 "on" momentarily if the voltage is changing rapidly due to an ESD discharge into the V_{esd} node 340 via the I/O pad 330 and diode 331. Typically, this transient detector 350 may be realized using an RC rate detector and possibly an inverter which drives BIGFET's gate. When "on," BIGFET clamp 300 must shunt a current on the order of Amps to ground so that voltage drops within the chip do not exceed junction breakdown voltages.

The threshold detector 360 may be optional and is used to limit the voltage on the V_{esd} bus 340. Transients can appear at the I/O pad 330 such as waveform overshoot due to transmission line effects. This over voltage can appear on the V_{esd} bus 340. Note that the assumption is that the transistors associated with the BIGFET clamp 300 can reliably tolerate the normal maximum pad voltage minus a diode drop but cannot reliably tolerate a large transient overshoot or spike on the I/O pad 330 which leaves V_{esd} 340 at a much higher level. Thus, as a predetermined voltage or threshold is crossed on V_{esd} 340 due to a transient spike on the I/O pad 330, the threshold detector 360 turns the BIGFET clamp 300

"on", which in turn holds the voltage on the V_{esd} bus 340 at the threshold value. One of the added advantages of this detector 360 is to reduce signal reflections at the I/O pad 330 because of the attenuating effect of turning on the BIGFET clamp 300 during a signal overshoot condition.

A capacitor 371 may be implemented to help attenuate a CDM ("Charge Device Model") ESD transient (as described in the aforementioned Related Patent Application). Because of the fast rise time of a CDM discharge the time constant of this capacitor and its associated parasitic resistance should be less than 100ps.

3. ESD PROTECTION CIRCUIT WHERE MAXIMUM PAD VOLTAGE EXCEEDS PROCESS MAXIMUM VOLTAGE

Reference is to Figure 4, where it is shown generalized V_{esd} bus clamp devices 401, 402, for applications in which the normal V_{esd} bus 440 voltage exceeds the process voltage limit imposed on a transistor's gate oxide. For example, there are processes which allow a maximum voltage of 3.6 v to appear across a gate oxide but a chip requirement may mandate that it interfaces to 5 v signals. For this case, a BIGFET clamp as previously described may be realized using two large series MOSFETs 401, 402. The bias network 410 may be designed so that during normal chip operation no voltage greater than 3.6 v, or whatever the process limit is, appears across any oxide even though a 5.5 v amplitude signal (maximum for a 5 v system) can appear across an I/O pad (not shown). Thus, the bias network 410 partitions voltages to the two large MOSFETs 401, 402, meeting the process reliability limits while keeping them in the "off" state. A possible implementation of the bias network will be described in Figure 5 below.

As in the previous case, a transient detector 450 and a threshold detector 460 may be used to turn on MOSFETs 401, 402. A diode 470 is a large "robust diode" as described in the aforementioned Related Patent Application and may be used as a CDM attenuation capacitor. A gate oxide capacitor cannot be used since it is assumed that the voltage on V_{esd} 440 exceeds the reliability limit of the gate oxide.

4. ANOTHER PREFERRED EMBODIMENT

Reference is to Figure 5, where another embodiment of the V_{esd} bus clamp circuit is shown. The two series transistors, 501 and 502, function as the "BIGFET" clamp and are connected between V_{esd} 540 and V_{ss} 572 or ground. A diode 521 is used to charge V_{esd} 540 to a voltage level of $(V_{dd}-V_{diode})$. A resistor 550 and PFET 552 function as the transient detector and PFETs 560 and 561 function as the threshold detector. During normal operation, the gate of PFET 502 is set to V_{dd} and the gate of PFET 501 is set to V_{esd} . For the sake of illustration assume that V_{dd} is 3.3 v and that

V_{esd} is set to 5.0 v by a pad signal. Also assume that the PFET threshold voltage (V_{tp}) is -1.0V. The quiescent voltages on the PFET 501 drain (node 1), gate (node3), source (V_{esd}), and body (well) are ($V_{dd}-V_{tp}$) or 4.3 v, 5 v, 5 v, and 5 v, respectively. For PFET 502, the drain, gate, source, and body voltages are 0 v, 3.3 v, 4.3 v ($V_{dd}-V_{tp}$), and 5 v, respectively. Thus, for PFET 501 the gate to drain, gate to source, and the gate to body voltages are 0.7 v, 0 v, and 0 v, respectively. For PFET 502, they are 3.3 v, 1.0 v and 1.0 v. Both transistors are in a non-conducting state, and only leakage currents flow from V_{esd} to V_{ss} . Note that no voltage greater the 3.6 v (the maximum allowed for the process) appears across the gate oxide of either of the clamp MOS PFETs 501, 502.

The circuit of Figure 5 protects against an ESD discharge as follows. Assuming that the chip is unpowered, a fast positive transient coupled to V_{esd} 540 will not cause V_{dd} to rise much above V_{ss} due to the large circuit capacitance between V_{dd} and V_{ss} . The MOSFET 552, which is used as a capacitor, will momentarily keep PFET 501's gate potential at that of V_{dd} . Thus, both PFET's 501 and 502 will be in the "ON" state since both of their gate potentials are near V_{ss} 572, while their sources are being pulled up by V_{esd} 540. The time and the degree to which PFET's 501 and 502 are "ON" may be determined by the RC time constant of resistor 550 and PFET 552 capacitance.

Threshold clamping is determined by PFET's 560 and 561. PFET 501 begins to turn ON once V_{esd} 540 is greater than V_{dd} by three V_{tp} drops or, for the example above, about 6.3 v. Once PFET 501 turns "ON" it will pull the source voltage of PFET 502 toward V_{esd} 540 thus turning on PFET 502. PFET's 501 and 502 will therefore offer a strong conducting path between V_{esd} 540 and V_{ss} 572 if V_{esd} 540 rises much above 6.3 v thereby clamping V_{esd} 540.

Although only a few exemplary embodiments of this invention have been described in detail above, those skilled in the art will readily appreciate that many modifications are possible in the exemplary embodiments without materially departing from the novel teachings and advantages of this invention. Accordingly, all such modifications are intended to be included within the scope of this invention as defined in the following claims. In the claims, means-plus-function clause are intended to cover the structures described herein as performing the recited function and not only structural equivalents but also equivalent structures. Thus although a nail and a screw may not be structural equivalents in that a nail employs a cylindrical surface to secure wooden parts together, whereas a screw employs a helical surface, in the environment of fastening wooden parts, a nail and a screw may be equivalent structures.

It should be noted that the objects and advantages of the invention may be attained by means of any compatible combination(s) particularly pointed out in the items of the following summary of the invention and the appended claims.

SUMMARY OF INVENTION

1. An ESD protection network for IC with a plurality of power supplies and at least one pad for accepting an input, said input not exceeding the voltage level of said plurality of power supplies, comprising:

a transient clamp for providing a low impedance path to a fast transient current;
a plurality of diodes;
a bus having a first end coupled to the cathodes of said plurality of diodes and having a second end coupled to said transient clamp;
a plurality of power supply pads, each of said plurality of pads being coupled to an anode of one of said plurality of diodes.

2. A network wherein said transient clamp comprises:

at least one transistor for providing low impedance when switched on;
a transient detector coupled to said at least one transistor for switching it on when a rapid voltage increase beyond a predetermined level occurs across it on said bus.

3. A network wherein said at least one transistor is serially connected to said bus.

4. A network wherein said transient detector is an RC network with a predetermined time constant.

5. A network further comprising a charge pump coupled to said bus for maintaining said bus to a predetermined voltage equal to the highest voltage on one of said plurality of pads.

6. A network wherein said plurality of diodes are P+/well diodes.

7. A network wherein said transient clamp is constructed with bipolar devices.

8. A network wherein said transient clamp is constructed with MOSFET devices.

9. An ESD protection network for an integrated circuit ("IC") with a predetermined substrate, said IC being coupled to at least one power supply having a predetermined voltage level and said IC having at least one input pad for receiving an input, comprising:

a transient clamp coupled to said substrate for providing a low impedance path to said substrate when said voltage level of said input exceeds said predetermined voltage level of said power supply;

at least one diode having its anode coupling to said at least one power supply;
a bus having a first end coupled to said transient clamp and a second end coupling to the cathode of said at least one diode.

5

10. An ESD protection network wherein said at least one diode comprises a P⁺/well diode.

11. A network wherein said transient clamp is constructed with bipolar devices.

10

12. A network wherein said transient clamp is constructed with MOSFET devices.

15

13. An ESD protection network for an integrated circuit ("IC") with a predetermined substrate, said IC being coupled to at least one power supply having a predetermined voltage level and said IC comprising at least one input pad for receiving an input, said input having an input voltage, said ESD protection network comprising:

20

a transient clamp coupled to said predetermined substrate for providing a low impedance path to said substrate when said input voltage exceeds a predetermined maximum process voltage, said transient clamp comprising two serially connected transistors;
at least one diode having its anode coupled to said at least one power supply;
a bus having a first end coupled to said transient clamp and a second end coupling to the cathode of said at least one diode;
a bias network coupled to said serially connected transistors and to said input pad for biasing said transistors, in a first mode, ON and in a second mode, OFF based on whether said input voltage exceeds said predetermined maximum process voltage, respectively.

25

30

35

40

14. An ESD protection network wherein said bias network keeps said serially connected transistors OFF and at voltage levels not greater than said predetermined maximum process voltage while said IC is operating normally.

45

15. An ESD protection network further comprising a transient detector coupling to said bias network for activating said bias network when detecting a transient caused by said input voltage exceeding said predetermined maximum process voltage.

50

16. An ESD protection network wherein said two serially connected transistors are p-channel field-effect transistors.

55

17. An ESD protection network wherein said two serially connected transistors are n-channel field-effect transistors.

18. A circuit said two serially connected transistors further operating a third mode by turning ON said two transistors when said bus experiences a voltage exceeding a second predetermined voltage from said input.

19. A network wherein said transient clamp is constructed with bipolar devices.

20. A network wherein said transient clamp is constructed with MOSFET devices.

Claims

1. An ESD protection network for IC with a plurality of power supplies and at least one pad 130 for accepting an input, said input not exceeding the voltage level of said plurality of power supplies, comprising:

a clamp 100;
a plurality of diodes 110, 140, 150, 191;
a bus 140; and
power supply pads 120, 160, 190.

2. An ESD protection network for IC with a plurality of power supplies and at least one pad 130 for accepting an input, said input not exceeding the voltage level of said plurality of power supplies, comprising:

a transient clamp 100 for providing a low impedance path to a fast transient current;
a plurality of diodes 110, 140, 150, 191;
a bus 140 having a first end coupled to the cathodes of said plurality of diodes 110, 140, 150, 191 and having a second end coupled to said transient clamp 100;
a plurality of power supply pads 120, 160, 170, 190, each of said plurality of pads being coupled to an anode of one of said plurality of diodes 110, 140, 150, 191.

3. A network according to Claim 1, wherein said transient clamp 100 comprises:

at least one transistor 300 for providing low impedance when switched on;
a transient detector 350 coupled to said at least one transistor 300 for switching it on when a rapid voltage increase beyond a predetermined level occurs across it on said bus 140.

4. A network according to Claim 2, wherein said at least one transistor 300 is serially connected to said bus 140.

5. A network according to Claim 2, wherein said transient detector 350 is an RC network with a predetermined time constant.

connected transistors 401, 402 OFF and at voltage levels not greater than said predetermined maximum process voltage while said IC is operating normally.

6. An ESD protection network for an integrated circuit ("IC") with a predetermined substrate 102, said IC being coupled to at least one power supply 120 having a predetermined voltage level and said IC having at least one input pad 130 for receiving an input, comprising:

a transient clamp 100 coupled to said substrate 102 for providing a low impedance path to said substrate 102 when said voltage level of said input exceeds said predetermined voltage level of said power supply 120;
at least one diode 110 having its anode coupling to said at least one power supply 120;
a bus 140 having a first end coupled to said transient clamp 100 and a second end coupling to the cathode of said at least one diode 110.

7. An ESD protection network according to Claim 9, wherein said at least one diode 110 comprises a P⁺/well diode.

8. A network according to Claim 9, wherein said transient clamp 100 is constructed with bipolar devices.

9. An ESD protection network for an integrated circuit ("IC") with a predetermined substrate 102, said IC being coupled to at least one power supply 120 having a predetermined voltage level and said IC comprising at least one input pad 130 for receiving an input, said input having an input voltage, said ESD protection network comprising:

a transient clamp 100 coupled to said predetermined substrate 102 for providing a low impedance path to said substrate 102 when said input voltage exceeds a predetermined maximum process voltage, said transient clamp 100 comprising two serially connected transistors 401, 402;
at least one diode 110 having its anode coupled to said at least one power supply 120;
a bus 140 having a first end coupled to said transient clamp 100 and a second end coupling to the cathode of said at least one diode 110;
a bias network 410 coupled to said serially connected transistors 401, 402 and to said input pad 130 for biasing said transistors 401, 402 in a first mode, ON and in a second mode, OFF based on whether said input voltage exceeds said predetermined maximum process voltage, respectively.

10. An ESD protection network according to Claim 13, wherein said bias network 410 keeps said serially

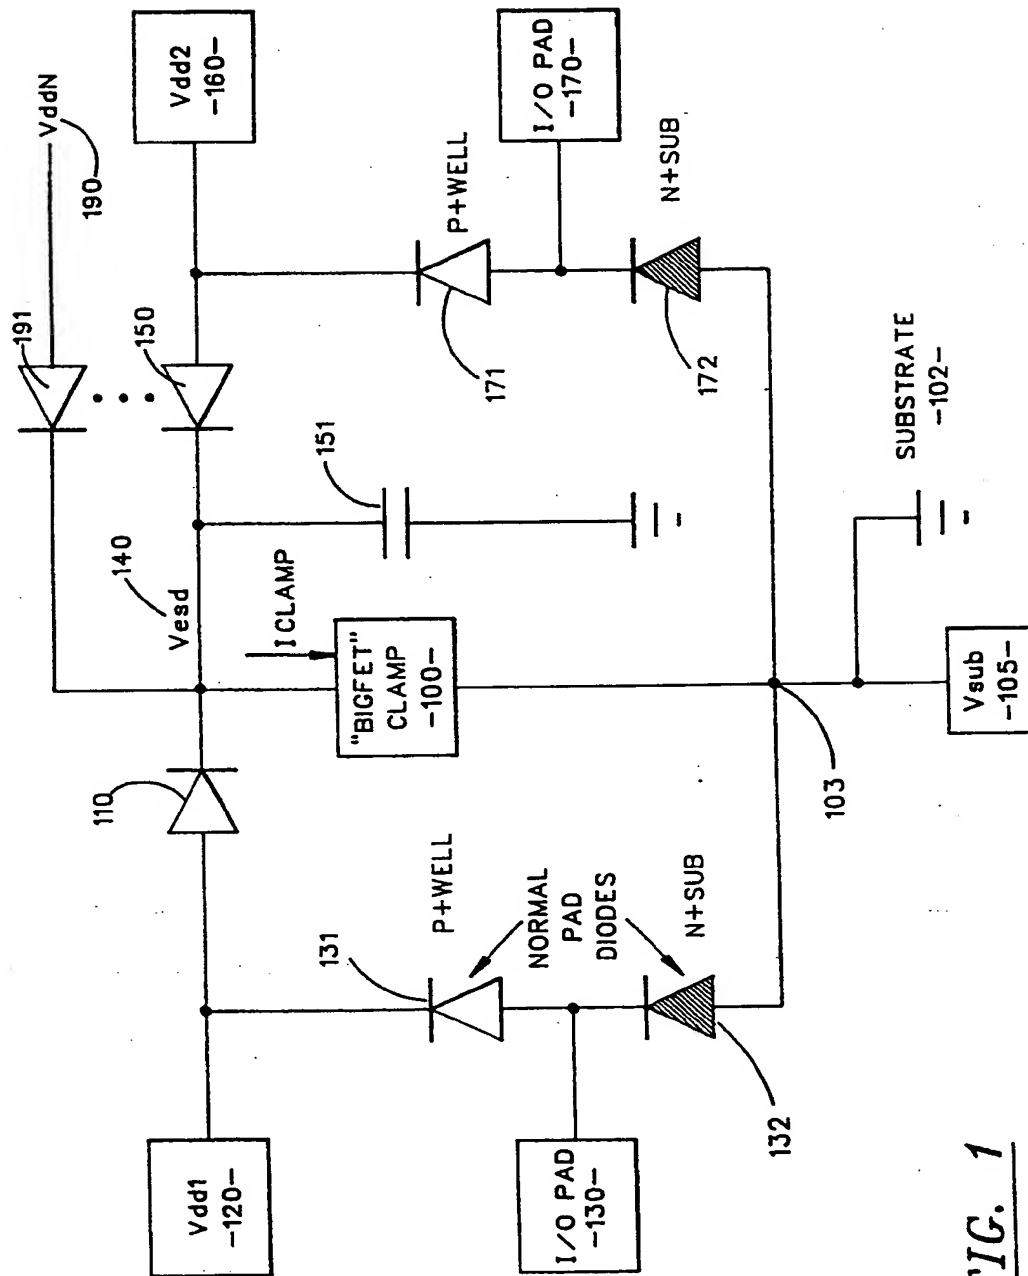


FIG. 1

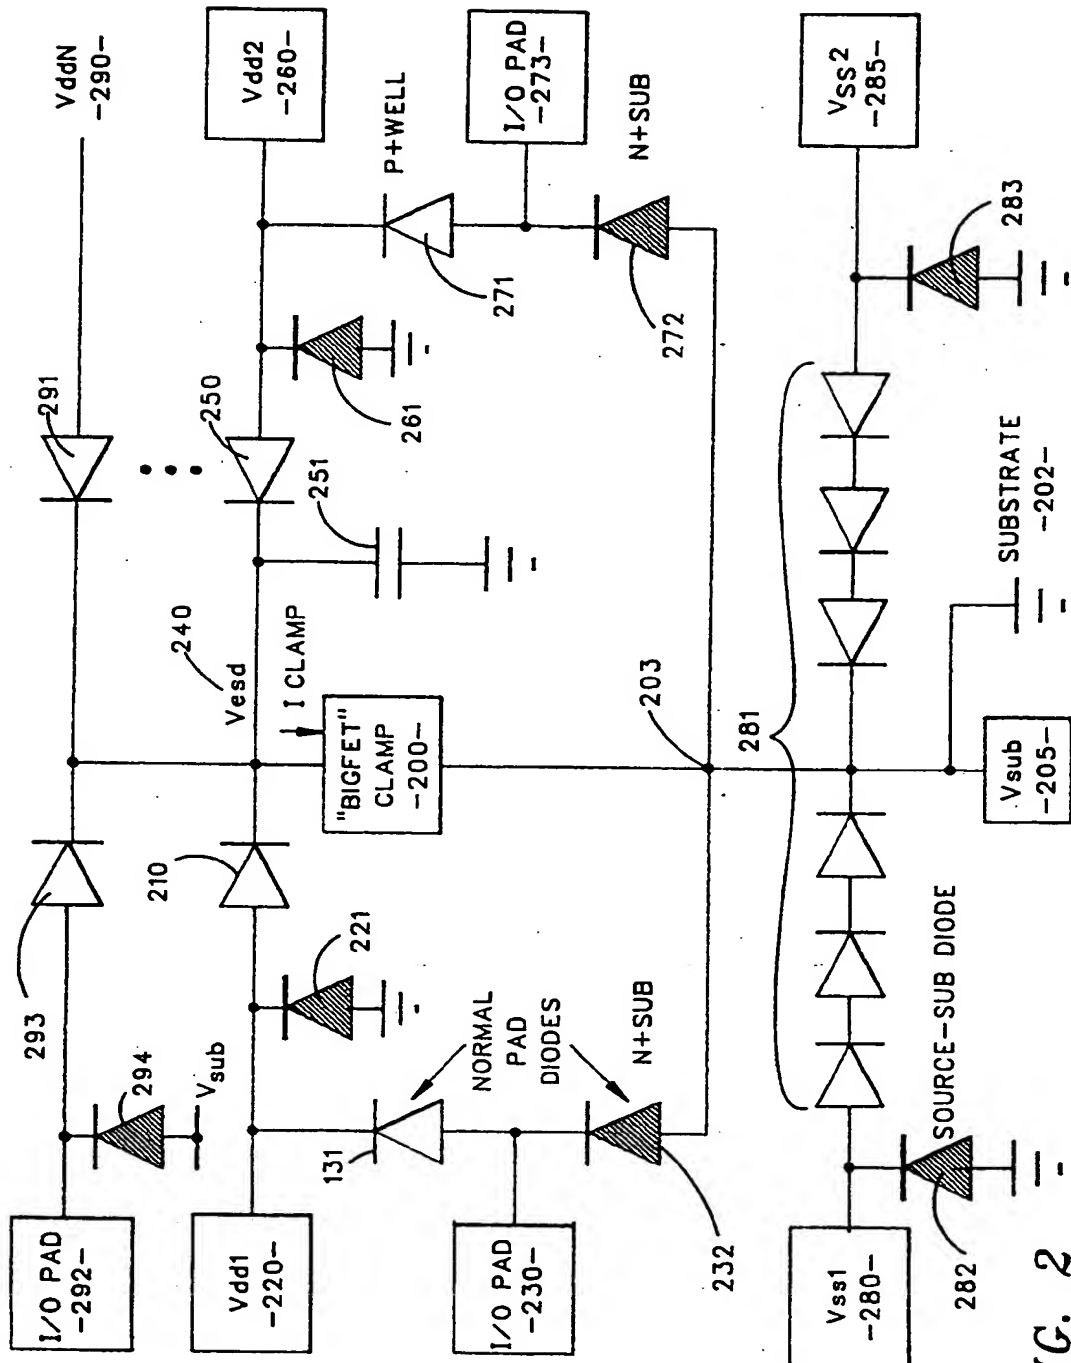


FIG. 2

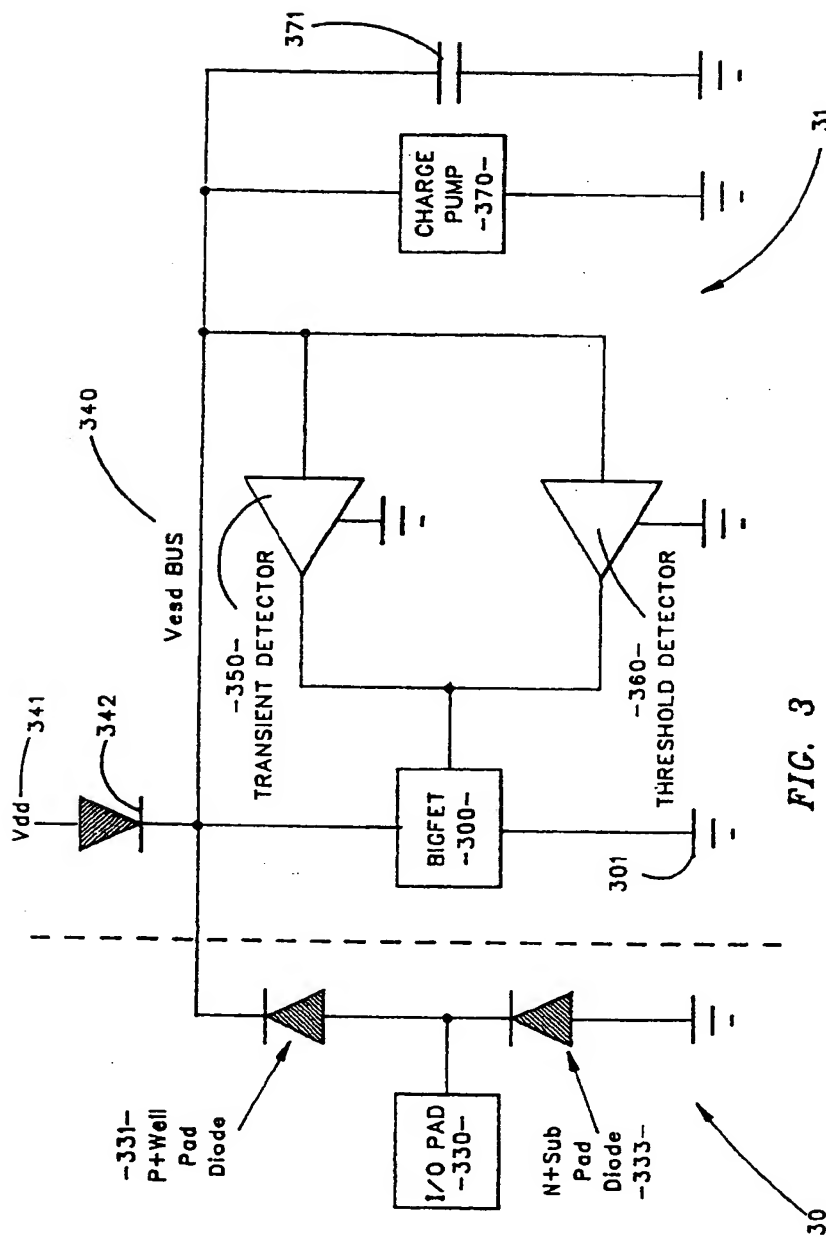


FIG. 3
GENERALIZED ESD CLAMP FOR I/O PADS
WHERE INPUT VOLTAGES EXCEED V_{dd}

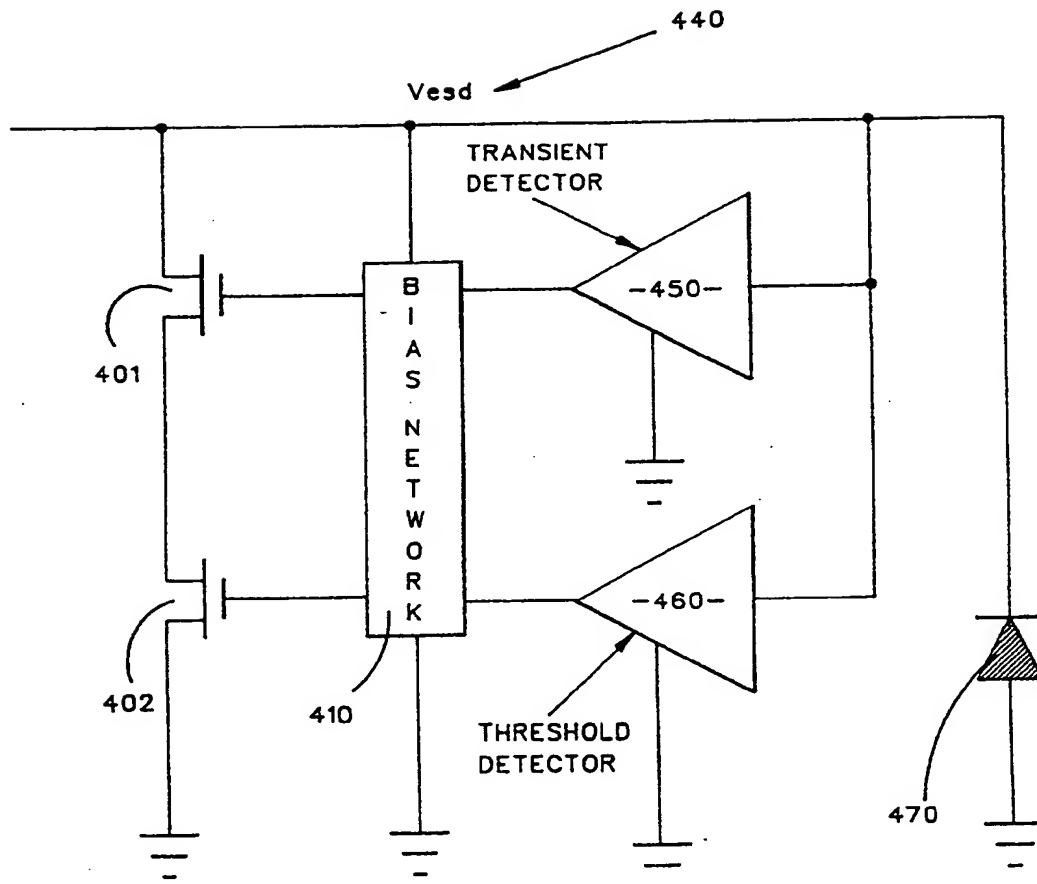


FIG. 4
GENERALIZED ESD POWER SUPPLY
CLAMP USING 'BIGFETs' WHOSE
PROCESS DESIGN VOLTAGE IS
LOWER THAN V_{esd}

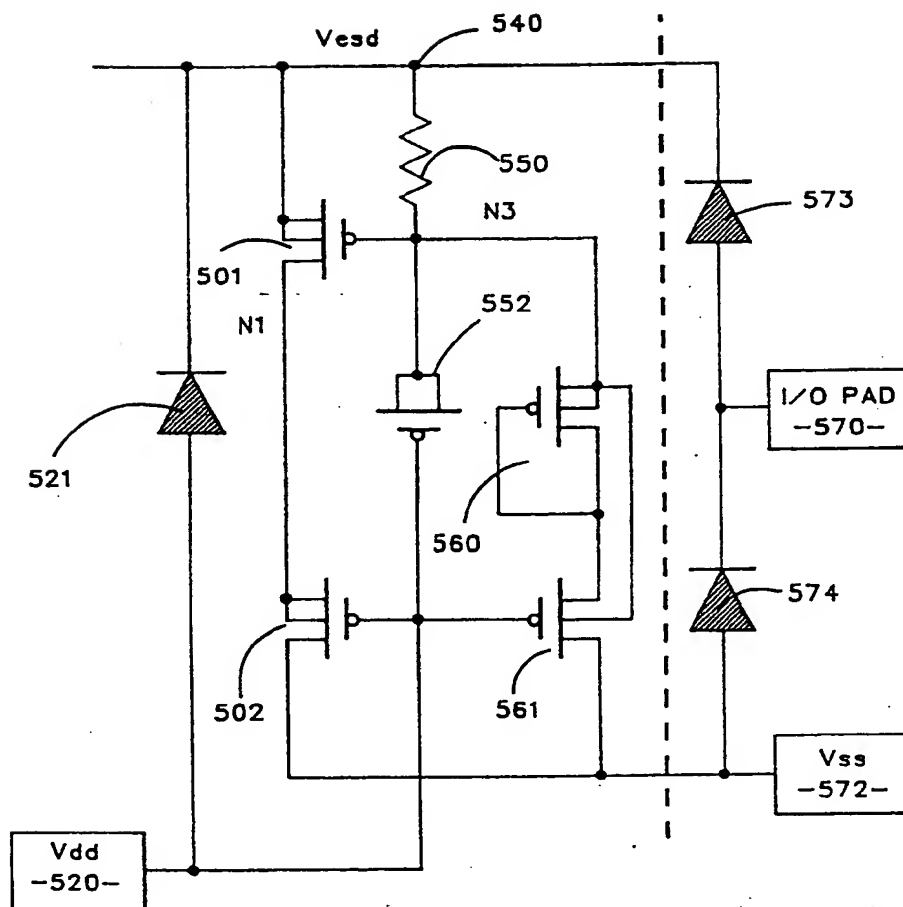


FIG. 5
EXAMPLE OF A CIRCUIT
IMPLEMENTATION OF ESD
POWER SUPPLY CLAMP IN
FIGURE 4.

(19)



Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 0 740 344 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
29.07.1998 Bulletin 1998/31

(51) Int. Cl.⁶: H01L 27/02, H02H 9/04

(43) Date of publication A2:
30.10.1996 Bulletin 1996/44

(21) Application number: 96106206.4

(22) Date of filing: 19.04.1996

(84) Designated Contracting States:
DE FR GB

(30) Priority: 24.04.1995 US 427017

(71) Applicant:
ROCKWELL INTERNATIONAL CORPORATION
Seal Beach, California 90740-8250 (US)

(72) Inventors:
• Worley, Eugene R.
Irvine, California 92720 (US)

• Nguyen, Chilan T.
Fullerton, California 92633 (US)
• Kjar, Raymond A.
Costa Mesa, California 92626 (US)
• Tennyson, Mark R.
Irvine, California 92714 (US)

(74) Representative:
Geyer, Ulrich F., Dr. Dipl.-Phys.
WAGNER & GEYER,
Patentanwälte,
Gewürzmühlstrasse 5
80538 München (DE)

(54) **Method and apparatus for coupling multiple independent on-chip V_{dd} busses to an ESD core clamp.**

(57) A single clamp circuit 100 for integrated circuits with multiple V_{dd} power pins by coupling the various V_{dd} busses to an ESD clamped V_{dd} bus 140 or pseudo- V_{dd} bus via diodes 110, 150, ..., 191. The diodes will provide coupling from any V_{dd} bus 140 to the clamp circuit 100 during a positive ESD transient. A diode 110 for each V_{dd} bus and a single clamp circuit can be much more area efficient than a single clamp circuit for each V_{dd} bus. During normal operation, the diodes 110, 150, ..., 191 will become weakly forward biased due to the leakage current of the clamp circuit. Small signal noise will tend not to be coupled from one bus 140 to the other because of the high impedance of the diodes 110, 150, ..., 191. For a large positive noise transient on one bus 140, the other bus diode will reverse bias, thus decoupling the signal from the other busses. A large negative noise transient on one bus 140 will cause its diode to reverse bias thus decoupling it from the other busses. To help filter small signal noise and provide an additional charged device model discharge path, a capacitor 151 is added from the pseudo or ESD V_{dd} to substrate ground. Also disclosed is an ESD protection scheme for allowing a pad voltage to exceed the power supply voltage without using an avalanche junction as the ESD protection means. Further disclosed is a clamp scheme for allowing the transistors of the power supply clamp to see voltages lower than that of the pad voltage

which exceed the process reliability limits.

EP 0 740 344 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 96 10 6206

| DOCUMENTS CONSIDERED TO BE RELEVANT | | | |
|--|--|--|--|
| Category | Citation of document with indication, where appropriate, of relevant passages | Relevant to claim | CLASSIFICATION OF THE APPLICATION (Int.Cl.6) |
| X | WO 95 10855 A (INTEL CORP) 20 April 1995 * page 10, line 8 - page 11, line 20 * | 1,3,6-10 | H01L27/02 H02H9/04 |
| X | MING-DOU KER ET AL: "Whole-chip ESD protection for CMOS VLSI/ULSI with multiple power pins" 1994 INTERNATIONAL INTEGRATED RELIABILITY WORKSHOP FINAL REPORT, 16 - 19 October 1994, LAKE TAHOE, CA, USA, pages 124-128, XP002046551 * page 125, paragraph 3; figure 3 * | 1,6 | |
| A | US 5 301 084 A (MILLER WILLIAM E) 5 April 1994 * figures 3,5 * | 3,5,8 | |
| | | | TECHNICAL FIELDS SEARCHED (Int.Cl.6) |
| | | | H03K H02H H01L |
| The present search report has been drawn up for all claims | | | |
| Place of search MUNICH | | Date of completion of the search 8 May 1998 | Examiner Brown, J |
| <p>CATEGORY OF CITED DOCUMENTS</p> <p>X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document</p> <p>T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document</p> | | | |

EPO FORM 1503 03/82 (P/NC01)